



Computational Simulation of Magneto Convection Flow of Williamson Hybrid Nanofluid with Thermal Radiation Effect

Hamzeh T. Alkawasbeh^{1,*}, Feras M. Al Faqih², Abedalrahman S Shoul²

¹ Department of Mathematics, Faculty of Science, Ajloun National University, P.O. Box 43, Ajloun 26810, Jordan

² Department of Mathematics, Al-Hussein Bin Talal University ,Ma'an-Jordan, Jordan

ARTICLE INFO

Article history:

Received 6 October 2022

Received in revised form 8 November 2022

Accepted 9 December 2022

Available online 1 April 2023

Keywords:

Williamson hybrid nanofluid; MHD; stretching sheet; thermal radiation

ABSTRACT

The theme of this model is to examine the characteristics of heat and mass transfer flow through stretching sheet along with magnetic field and thermal radiation utilizing Al_2O_3+CuO/SA Williamson hybrid nanofluid. The transformed partial differential equations are solved by Keller-Box method. The numerical outcomes of physical quantities are revealed by graphs and tables. The Nusselt number, skin friction, velocity and temperature are displayed with support of bar diagram. The study depicted that an increase in the Weissenberg number, radiation, and magnetic parameter surges in fluid temperature, results in an improvement in the thermal boundary layer, this effect reduces the fluid velocity and skin friction coefficient. Excellent correctness of the current results has been acquired as compared thru the previous results.

1. Introduction

The Williamson fluid is a significant example of a non-Newtonian fluid; Williamson [1] presents model equations to describe the flow of pseudoplastic fluids and gives experimental proof of the conclusions in (1929). It has several potential uses, including in the photographic film emulsion coating and liquid film condensation processes. In addition, this non-Newtonian fluid has several industrial uses, particularly in the realm of pseudoplastic fluid behavior. Measuring mass and heat transport across the arteries in blood and hemodialysis is very crucial in the field of biological engineering [2]. Radiative Williamson fluid was investigated for its response to a magnetic field by Subbarayudu *et al.*, [3]. For their study, Sucharitha *et al.*, [4] examined how slip affected the peristaltic motion of a Williamson fluid. Dawar *et al.*, [5] provided an illustration of the flow of a Williamson nanofluid through a cone under non-isosolutal and non-isothermal circumstances. Two-dimensional Williamson nanofluid flow in stretchy sheets was investigated using Darcy's law by Kiyani *et al.*, [6]. Qureshi [7] looked at how thermal radiation affected Williamson nanofluid's heat transport. Recent studies related to Williamson nanofluid are presented in the Refs [8-11].

* Corresponding author.

E-mail address: alkawasbeh@gmail.com (Hamzeh T. Alkawasbeh)

The study of nanofluids is highly regarded in the scientific community. Nanomaterials with exceptional thermal characteristics may be used in a wide range of fields, from medicine and energy generation to heat exchange and electronic cooling systems. Due to its superior thermal conductivity, nanofluid has replaced base fluid as the preferred working fluid in many modern applications. Choi and Eastman [12] are credited with discovering nanofluids in the first place. Nanofluids are fluids that contain nanoparticles floating inside of them. Lee *et al.*, [13] verified that nanofluids exhibit superior heat transfer properties compared to those of basic liquids. Chemically stable oxides (SiO_2 , CuO , Al_2O_3 , TiO_2), carbides (SiC), metals (Au , Cu , Fe , Al , Ag), non-metals (carbon nanotubes, graphite), nitrides (AlN , SiN) are commonly proposed for the nanoparticles, and the base fluid is typically a conductive fluid such as water, oils (and further lubricants), propylene-gly. Numerous researchers [14-17] have since shown that the nanofluids exhibit superior thermo-physical properties and heat-transport behavior compared to their base fluid counterparts. Adding copper nanoparticles to oil or ethylene glycol at a volume fraction of less than one percent, as determined by Eastman *et al.*, [14], increases thermal conductivity by 40 %. As Aybareet *et al.*, [15] noted, several nanofluids have improved their heat conductivity. Increasing the number of nanoparticles in a liquid, they found, increases its thermal conductivity. Nanofluids have several uses, including the administration of nano-drugs, the rapid transfer of heat, the cooling of a microchannel, and the prevention of clogging. Afify and Bazid [16] studied the effects of viscous dissipation and changing viscosity on the heat transfer and boundary layer flow on a rotating porous surface immersed in nanofluids. The effects of the particle model and thermal radiation on the heat transmission and Marangoni boundary sheet flow of a nanofluid moving through an exponential temperature were demonstrated by Lin *et al.*, [17]. In recent times, a number of studies [18-23] examined the flow of a (MHD) Casson nanofluid by a stretching sheet, solid sphere and horizontal circular cylinder.

A hybrid nanofluid (HNF) is created by mixing two and more different nanoparticles in the same base fluid in order to create a (HNF). Most of the applications of this fluid are in the field of industry and manufacturing, such as: coolant for electronic devices, solar energy, automotive generators, transformers, industry, and nuclear systems and so on [24]. In recent years, hybrid nanofluids have become the first choice over conventional fluids because of this several reasons. They possess properties such as electrical conductivity and permeability [25], they are more efficient at transferring heat [26], and some of the combinations of two nanoparticles make the HNF more fluid become more stable [27]. Yahya *et al.*, [28] discussed the Runge-Kutta method was utilized to examine thermal dissipation, heat source, and magnetic field in ordinate engine oil using the novel hybridization of MoS_2+ZnO . The investigation of heat sources and their impact on heat transport is crucial in light of a wide variety of physical issues. Heat source effects on hybrid nanofluid using the headline method were documented by Alsabery *et al.*, [29]. There are recent additions to the field that consider hybrid and conventional nanofluids with heat and mass transfer under a variety of physical conditions [30-39].

Recently, the subject of magnetic field for Newtonian and non-Newtonian fluid flows engrossed many researchers, because of its widespread applications in different fields. The magnetic field treated as an external agent to develop the thermal conductivity and thermophysical attributes of fluid flow. The flows consist of magnetic field mostly used in the problems which are related to geophysical and astrophysical mechanism, but recently magnetohydrodynamics flows are used in cancer treatment, fusion power, plasma studies, MRI, generators, heat exchanger process etc. Sarpakaya [40] first time surveyed the non-Newtonian fluid flow by means of magnetic field. Hussanan *et al.*, [41] studies the magnetohydrodynamic (MHD) flow of a Casson fluid and the heat transfer to a nonlinearly stretching sheet with Newtonian heating. Alkassasbeh [42] deliberated the mixed convective MHD flow of micropolar Casson fluid across a solid sphere. The effects of varying

viscosity on the flow of axisymmetric nanofluids subjected to unsteady magnetohydrodynamics (MHD) with thermal diffusion were studied by Bagh *et al.*, [43]. Tlili *et al.*, [44] evaluated computational studies of MHD dissipative flow through a stretched sheet. The slip effects of MHD micropolar nanofluids were explored by Sohaib *et al.*, [45]. The effects of a heat source on MHD flow of nanofluid employing a stretched sheet were studied by Abbas *et al.*, [46]. Some recent studies about MHD fluid flow are seen in the Refs [47-52].

In consideration of the afore-mentioned development and research applications in nanofluids, our key objective is to inspect in it in contemporary work, we have MHD of Williamson hybrid nanofluid of boundary layer stream over a stretching sheet in the company of thermal radiation. The governing boundary layer equations are altered to nonlinear ODEs via similarity transformation which are formerly determined numerically using Keller box methods. The consequence of numerous parameters via velocity, temperature, and concentration distribution are inspected graphically. The skin friction and Nusselt number are also observed by tabulated data. Furthermore, a comparison of the present article has been presented with previous literature.

2. Mathematical Model

Here, we consider 2D, incompressible, free convection boundary layer flow of Williamson hybrid nanofluid by the influence of MHD and thermal radiation over stretching sheet. In the present investigation the boundary constant wall temperature are also taken. To the analysis of transport of mass and heat, the thermal radiation and thermophoretic impacts are considered. Two perpendicular coordinate systems (x, y) are chosen since sheet motion follows the x -axis and the wall is non-compressible ($v_w = 0$) (see in Figure 1). With the usage of boundary layer approximation and above assumption the emerging equations are stated as, Ref [18, 28, 30].

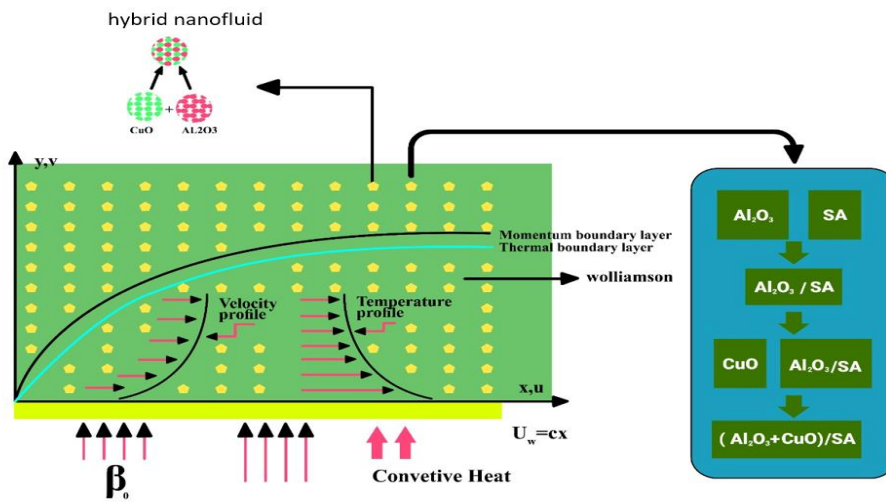


Fig. 1. Physical sketch of the model

Continuity equation

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \tag{1}$$

Momentum equation

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = V_{hnf} \frac{\partial u}{\partial y^2} - \frac{\sigma_{hnf}}{\rho_{hnf}} \beta_0^2 u + \sqrt{2} \Omega v_f \frac{\partial u}{\partial y} \frac{\partial^2 u}{\partial y^2} \quad (2)$$

Thermal energy equation

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \frac{k_{hnf}}{(\rho C_p)_{hnf}} \frac{\partial^2 T}{\partial y^2} - \frac{1}{(\rho C_p)_{hnf}} \frac{\partial q_r}{\partial y} \quad (3)$$

For above equations boundary conditions are inscribed as:

$$u = U_w = cx, \quad v = 0, \quad T = T_w(x) \text{ at } y = 0 \quad (4)$$

$$u \rightarrow 0, \quad T \rightarrow T_\infty \text{ as } y \rightarrow \infty$$

By considering Roseland approximation, the radiative heat flux at this point

$$q_r = -\frac{4\sigma^*}{3k^*} \frac{\partial T^4}{\partial y}; \quad (5)$$

Here σ^* , q_r , k^* are representative correspondingly as the Boltzmann constant, absorption coefficient and the radiative heat flux. Assuming a minor temperature alteration in flow, the Taylor series estimate for T_4 in expressions of T_∞ is as acquire

$$T^4 \cong 4TT_\infty^3 - 3T_\infty^3 \quad (6)$$

$$\frac{\partial q_r}{\partial y} = \frac{16\sigma^* T_\infty^3}{3k^* v_f (\rho C_p)_f} \frac{\partial^2 T}{\partial y^2} \quad (7)$$

Table 1
 Thermo-physical properties of hybrid nanofluid and nanoparticles

Properties	Nanofluid	Hybrid nanofluid
μ Viscosity	$\mu_{nf} = \frac{\mu_f}{(1-\phi)^{2.5}}$	$\mu_{hnf} = \frac{\mu_f}{(1-\phi_1)^{2.5}(1-\phi_2)^{2.5}}$
ρ Density	$\rho_{nf} = (1-\phi)\rho_f + \phi\rho_s$	$\rho_{hnf} = [(1-\phi_2)\{(1-\phi_1)\rho_f + \phi_1\rho_{s1}\}] + \phi_2\rho_{s2}$
ρC_p Heat capacity	$(\rho C_p)_{nf} = (1-\phi)(\rho C_p)_f + \phi(\rho C_p)_s$	$(\rho C_p)_{hnf} = \left[(\rho C_p)_f (1-\phi_2) \left((1-\phi_1) + \frac{\phi_1(\rho C_p)_{s1}}{(\rho C_p)_f} \right) + \phi_2(\rho C_p)_{s2} \right]$
K Thermal conductivity	$\frac{K_{nf}}{K_f} = \frac{K_s + (s_f - 1)K_f - (s_f - 1)\phi(K_f - K_s)}{K_s + (s_f - 1)K_f + \phi(K_f - K_s)}$	$\frac{K_{hnf}}{K_f} = \frac{(K_{s2} + 2K_{bf}) - 2\phi_2(K_{bf} - K_{s2})}{(K_{s2} + 2K_{bf}) + \phi_2(K_{bf} - K_{s2})}$ where $\frac{K_{bf}}{K_f} = \left[\frac{(\kappa_{s1} + 2\kappa_f) - 2\phi_1(\kappa_f - \kappa_{s1})}{(\kappa_{s1} + 2\kappa_f) + \phi_1(\kappa_f - \kappa_{s1})} \right]$
σ Electrical conductivity	$\frac{\sigma_{nf}}{\sigma_f} = 1 + \frac{3(\sigma - 1)\phi}{(\sigma + 2) - (\sigma - 1)\phi}$	$\frac{\sigma_{hnf}}{\sigma_{bf}} = \left[1 + \frac{3\phi_1(\sigma_1\phi_1 + \sigma_2\phi_2 - \sigma_{bf}(\phi_1 + \phi_2))}{(\sigma_1\phi_1 + \sigma_2\phi_2 + 2\phi\sigma_{bf}) - \phi\sigma_{bf}((\sigma_1\phi_1 + \sigma_2\phi_2) - \sigma_{bf}(\phi_1 + \phi_2))} \right]$

The variables of similarity for the problem are given as [18]

$$\psi = (cv)^{1/2}xf(\eta), \quad \eta = (cv)^{1/2}y, \theta(\eta) = \frac{T-T_\infty}{T_w-T_\infty} \quad (8)$$

Here, stream function is defined in term of velocity components $u = \frac{\partial\psi}{\partial y}$, $v = -\frac{\partial\psi}{\partial x}$

By using similarity transformations, stream function and Table 1 in Eqs. (1)-(4) the PDEs are transformed into following ordinary equations:

$$f''' - A_1(f'^2 - ff'') - A_2Mf' + A_1Wef''f''' = 0 \quad (9)$$

$$\theta'' \left[1 + \frac{1}{A_4} \text{Pr}N_r \right] + \frac{A_3}{A_4} \text{Pr}f\theta' = 0 \quad (10)$$

The nondimensionalized form of the boundary conditions are,

$$\begin{aligned} f(0) = 0, \quad f'(0) = 1, \quad \theta(0) = 1 \text{ at } \eta = 0 \\ f'(\eta) \rightarrow 0, \quad \theta(\eta) \rightarrow 0 \text{ as } \eta \rightarrow \infty \end{aligned} \quad (11)$$

The dimensionless parameters that are used in above equations are stated as:

where $\text{Pr} = \frac{v_f(\rho C_p)_f}{k_f}$ the Prandtl number, $M = \frac{\sigma B_0^2}{\rho_f c}$ the magnetic field parameter, $N_r = \frac{16 \sigma^* T_\infty^3}{3 k^* v_f(\rho C_p)_f}$ the radiation parameter and $We = x\sqrt{2}\Omega \sqrt{\frac{c^3}{v_f}}$ the Weissenberg number

Also,

$$A_1 = (1 - \phi_1)^{2.5}(1 - \phi_2)^{2.5} \left[(1 - \phi_2) \left\{ (1 - \phi_1) + \phi_1 \frac{\rho_{s1}}{\rho_f} \right\} + \phi_2 \frac{\rho_{s2}}{\rho_f} \right]$$

$$A_2 = (1 - \phi_2) \left\{ (1 - \phi_1) + \phi_1 \frac{\rho_{s1}}{\rho_f} \right\} + \phi_2 \frac{\rho_{s2}}{\rho_f}$$

$$A_3 = (1 - \phi_2) \left\{ (1 - \phi_1) + \phi_1 \frac{(\rho C_p)_{p1}}{(\rho C_p)_f} \right\} + \phi_2 \frac{(\rho C_p)_{p2}}{(\rho C_p)_f}$$

$$A_4 = \left[\frac{(\kappa_{s2} + 2\kappa_f) - 2\phi_2(\kappa_f - \kappa_{s2})}{(\kappa_{s2} + 2\kappa_f) + \phi_2(\kappa_f - \kappa_{p2})} \right] \left[\frac{(\kappa_{s1} + 2\kappa_f) + \phi_1(\kappa_f - \kappa_{s1})}{(\kappa_{s1} + 2\kappa_f) - 2\phi_1(\kappa_f - \kappa_{s1})} \right]$$

$$A_4 = (1 - \phi_1)^{2.5}(1 - \phi_2)^{2.5}$$

The non-dimensional physical quantities in this problematic are the Nusselt numbers, Nu and skin friction coefficient Cf distinct as:(see Refs. [28, 42]):

$$Nu = \frac{xq_w}{k_f(T_w-T_\infty)}, \quad Cf = \frac{\tau_w}{\rho_f U_w^2} \quad (12)$$

Here τ_w, q_w represents the wall shear stress and heat flux correspondingly expressed as:

$$q_w = k_{hnf} \frac{\partial T}{\partial y}, \tau_w = \mu_{hnf} \left(\frac{\partial u}{\partial y} + \frac{\Omega}{\sqrt{2}} \left(\frac{\partial u}{\partial y} \right)^2 \right) \text{ at } y = 0 \quad (13)$$

Finally, by placing the value of τ_w and q_w in the previous equation of skin friction and Nusselt number, converted as:

$$C_f Re^{\frac{1}{2}} = \frac{1}{A_5} [f''(0) + We f''(0)^2] \quad (14)$$

$$Nu Re^{-\frac{1}{2}} = -\frac{k_{hnf}}{k_f} (1 + N_r) \theta'(0) \quad (15)$$

where $Re = \frac{xU_w}{\nu_f}$ denotes Reynolds number

3. Numerical Solution

A Keller-box method was first proposed by Keller and Bramble [53] in 1971. Jones [54] solved boundary layer problems using this method about a decade later and also solved boundary layer problems using this method about a decade later. Keller-box procedure is discussed in detail in Cebeci and Bradshaw [55]. During more than three decades, it proved to be effective and capable of constructing an accurate numerical solution to the issues related to boundary layers by being unconditionally stable, with second-order convergence. In the present study, a numerical solution was constructed using this method. The Keller-box method procedure is illustrated in the following inflow Figure 2:

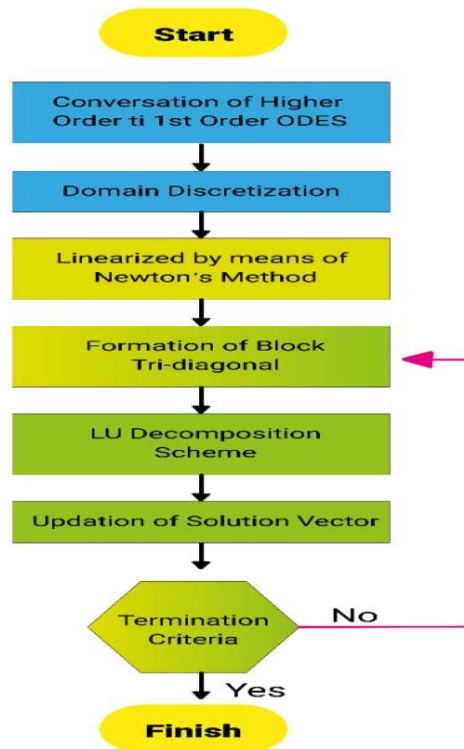


Fig. 2. Methodology of KBM

4. Results and Discussion

In this segment, we have discoursed the velocity and heat transmission features of Williamson hybrid nanofluid over a stretching sheet. The numerical problem is governed by physical parameters which comprise (M), (We), and (Nr). Solutions by KBM passed through MATLAB and calculated results are shown through graphs and tabular forms.

We selected Aluminium oxide (Al₂O₃) because of its great heat resistance and low electrical conductivity. In chemical reactions, copper oxide (CuO) is a popular oxidizing/reducing agent and process regulator. Also, sodium alginate (SA) was utilized as a thickening and moisture stabilizer.

Table 2
 provides a comparison of their thermophysical qualities [19]

Thermo-Physical property	Al ₂ O ₃	CuO	SA
$\rho(\text{kg/m}^3)$	6510	3970	989
$C_p(\text{J/kgK})$	540	765	4175
$K(\text{w/mK})$	18	40	0.6376
$\sigma(\text{s/m})$	5.96×10^7	3.5×10^7	2.6×10^{-4}
Pr			6.5

Table 3 displays the numerical results, which are in remarkable agreement with the existing data. We compared our findings to those of Hassanien *et al.*, [56], Salah *et al.*, [57], and Alkasasbeh *et al.*, [18] to show that our suggested numerical approach for the Williamson hybrid nanofluid over a stretched sheet is valid, accurate, and precise. This strengthens our conviction that the findings presented in this paper are very good.

Table 3
 Comparison of $Re^{-1/2} Nu$ with variation in Prandtl number, when $M=We= Nr=\phi_1 = \phi_2 = 0$

Pr	$Re^{-1/2} Nu$			
	Hassanien <i>et al.</i> , [56]	Salleh <i>et al.</i> , [57]	Alkasasbeh <i>et al.</i> , [18]	Present
0.72	0.46325	0.46317	0.46316	0.46357
1	0.58198	0.58198	0.58198	0.58198
3	1.16525	1.16522	1.16524	1.16524
5		1.56806	1.56807	1.56806
7		1.89548	1.89550	1.89551
10	2.30801	2.30821	2.30820	2.30821
100	7.74925	7.76249	7.76250	7.76250

The numerical results of Nusselt number and the friction coefficient for various values of magnetic field parameter M, the radiation parameter Nr and the Weissenberg number We are compiled in Table 4, which shows what happens when the hybrid nanofluid and the nanofluid are exposed to the same circumstances. Both the Nusselt number and the friction coefficient of the hybrid nanofluid decrease when M is decreased throughout this study. Compared to nanofluid, the melting point of the hybrid nanofluid is lower. This drop is also not usual for most fluids, so it's notable in both cases. Everyone knows that raising the Nusselt number of a fluid makes it less thick and more fluid. When compared to the influence of the (We) coefficient, Nusselt numbers exhibits a considerable rise when (We) are elevated, in the coefficient of friction addition to a very minor change in both fluids. This is in contrast to the effect of the M coefficient. The effect of Nr on Nusselt

number in both fluids shows that the values are stable, which shows that its effect is limited other than at low the coefficient of friction, where there seems to be little change in both fluids.

The effect of magnetic field parameter M on the velocity component $f'(\eta)$ and temperature $\theta(\eta)$ are seen in Figure 3 and Figure 4, respectively for both Al_2O_3+CuO/SA hybrid nanofluid and Al_2O_3/SA nanofluid. When a magnetic field is generated, the Lorentz force appears works to hinder the flow of the fluid, and its presence causes a rapid reduction in velocity at the boundary. In contrast, as fluid particles move, lines of magnetic field are distorted and electric current is produced, which is converted into heat energy due to the resistance of the fluid particles to electric current flow. This heat is utilized to increase the total energy of the fluid particles and therefore, temperature rises and the velocity of fluid is reduced.

Table 4
 Values of $Re^{-1/2}Cf$ and $Re^{-1/2}Nu$ for different values of We , Nr , and M

M	We	Nr	Hybrid nanofluid (Al_2O_3+CuO)/SA		Nanofluid (Al_2O_3)/SA	
			$Re^{-1/2}Nu$	$Re^{-1/2}Cf$	$Re^{-1/2}Nu$	$Re^{-1/2}Cf$
1	0.1	2	0.74280	-2.14012	1.15985	-1.95551
2			0.63030	-2.73888	1.00399	-2.45209
3			0.57294	-3.14333	0.91738	-2.81242
2	0.01	2	0.63375	-3.29974	1.01110	-2.84748
	0.1		0.63030	-2.73888	1.00399	-2.45209
	0.5		0.61270	-0.56004	0.96532	-0.17412
2	0.1	1	0.62859	-2.73888	0.99239	-2.45209
		2	0.55091	-2.73888	0.90031	-2.45209
		3	0.54284	-2.73888	0.89042	-2.45209

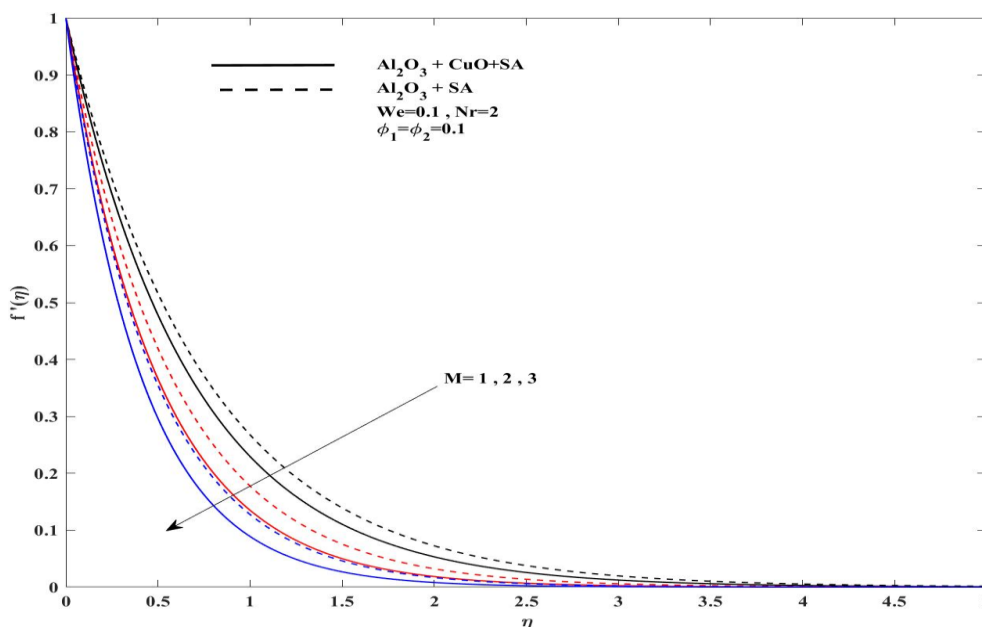


Fig. 3. Velocity $f'(\eta)$ fluctuation with M

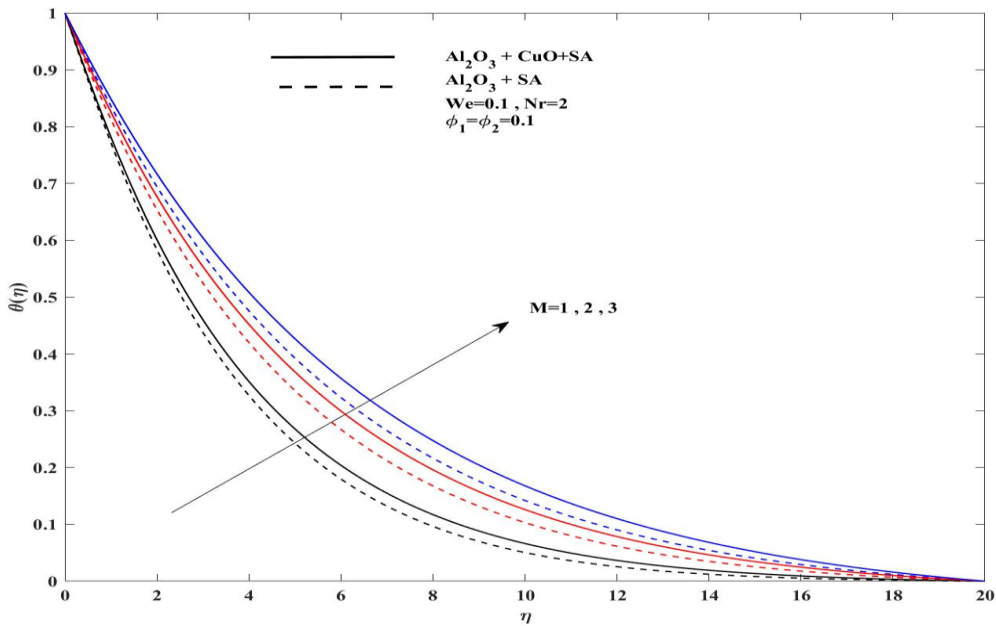


Fig. 4. Temperature $\theta(\eta)$ fluctuation with M

Figures 5 and 6 illustrate the influence of Weissenberg number (We) on velocity $f'(\eta)$ and temperature for both hybrid nanofluid and nanofluid. It appears that the velocity of both of the fluids decreases with the increasing values of (We) and the opposite happens with respect to temperature. In order to comprehend stretching processes like natural shear, it is vital to know the Weissenberg number (We), which specifies the degree of deformation anisotropy or direction. When subjected to frictional manipulations, the ephemeral fluid's non-Newtonian property is amplified, leading to increased fluidity. As a result of the fluid's reduced sensitivity to shear, less of the momentum of the moving boundary wall is transmitted to the fluid. Because of this, fluidity is hindered when fluid motion slows and the thickness of the momentum barrier layer lowers.

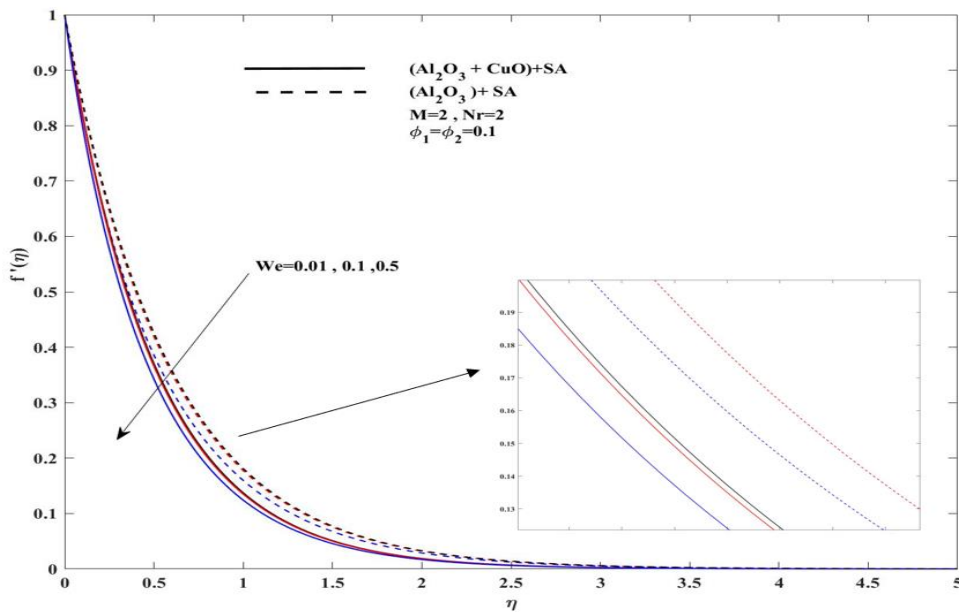


Fig. 5. Velocity $f'(\eta)$ fluctuation with We

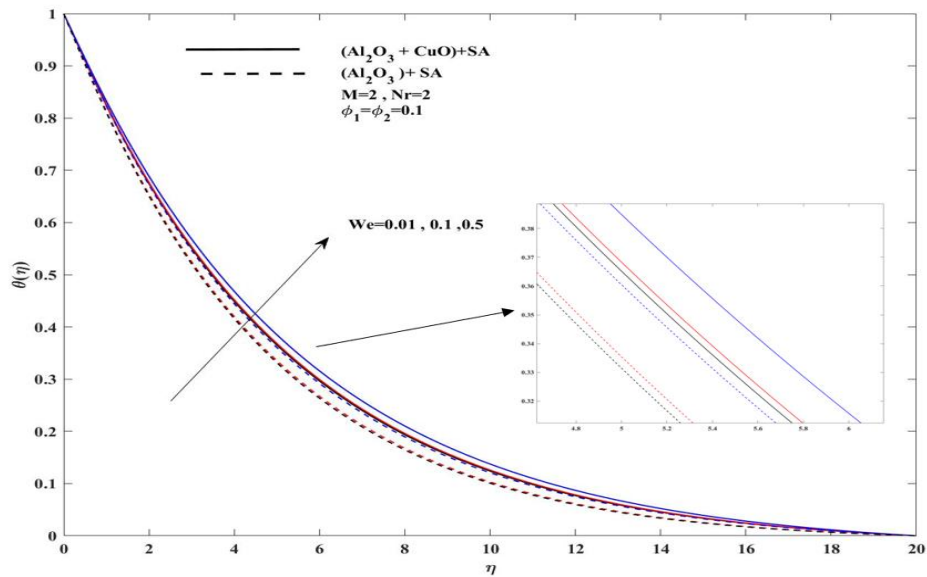


Fig. 6. Temperature $\theta(\eta)$ fluctuation with We

Finally, the temperature is shown for different thermal radiation intensities Nr in Figure 7 for both Al_2O_3+CuO/SA hybrid nanofluid and Al_2O_3/SA nanofluid. The radiation parameter is used to quantify the connection between the two forms of heat transport (conduction and thermal radiation). As a result, a higher value for Nr indicates that more radiative heat energy is being introduced into the system, leading to a higher temperature. Consequently, the radiation may regulate the temperature of the boundary layers.

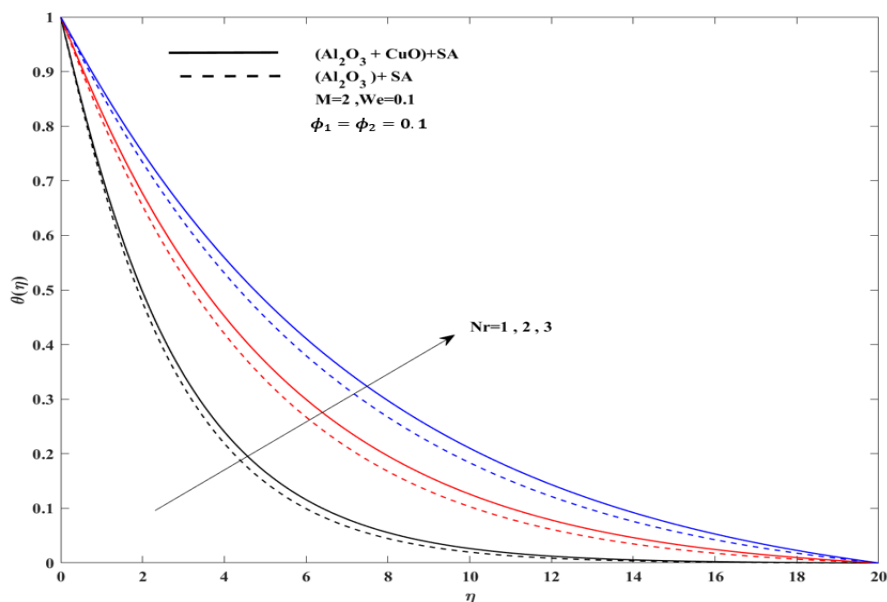


Fig. 7. Temperature $\theta(\eta)$ fluctuation with Nr

5. Conclusion

In this work, we analysed the consequences of heat and mass transfer of magnetic Williamson hybrid nanofluid flow over a stretched sheet with thermal radiation. The existing flow equations are tackled by KBM passed through MATLAB. The key results of the present analysis are:

- i. Increasing M and We contributions cause $f'(\eta)$ to decrease dramatically for both fluids.
- ii. A rise in temperature $\theta(\eta)$ due to an increase in M , Nr , and We .
- iii. Increases in We , Nr and M lead to a lower skin friction coefficient C_f .
- iv. The Nusselt number Nu outlines for both fluids reduce with rise in M , and the opposite happens with the effect of We .
- v. The velocity $f'(\eta)$ fluctuation of a fluid is not significantly affected by the Nr parameter.
- vi. Williamson nanofluid has the highest value for Nusselt number, skin friction and velocity profile. Moreover, it is the lowest value for temperature profile.

Acknowledgments

The authors heartily thank the Deanship of Scientific Research and Postgraduate Studies, Al-Hussein Bin Talal University, Ma'an—Jordan, for the financial support through voting No. (399/2020) for this research.

References

- [1] Williamson, R. Vo. "The flow of pseudoplastic materials." *Industrial & Engineering Chemistry* 21, no. 11 (1929): 1108-1111. <https://doi.org/10.1021/ie50239a035>
- [2] Razi, Shazwani Md, Siti Khuzaimah Soid, Ahmad Sukri Abd Aziz, Noorashikin Adli, and Zaileha Md Ali. "Williamson nanofluid flow over a stretching sheet with varied wall thickness and slip effects." In *Journal of Physics: Conference Series*, vol. 1366, no. 1, p. 012007. IOP Publishing, 2019. <https://doi.org/10.1088/1742-6596/1366/1/012007>
- [3] Subbarayudu, K., L. Wahidunnisa, S. Suneetha, and P. Bala Anki Reddy. "Nonlinear radiative williamson fluid against a wedge with aligned magnetic field." In *Advances in Fluid Dynamics: Selected Proceedings of ICAFD 2018*, pp. 263-275. Springer Singapore, 2021. https://doi.org/10.1007/978-981-15-4308-1_21
- [4] Sucharitha, G., G. Yasodhara, S. Sreenadh, and P. Lakshminarayana. "Effects of aligned magnetic field and slip on peristaltic flow of a williamson fluid in a flexible conduit with porous medium." In *Advances in Fluid Dynamics: Selected Proceedings of ICAFD 2018*, pp. 759-770. Springer Singapore, 2021. https://doi.org/10.1007/978-981-15-4308-1_59
- [5] Dawar, Abdullah, Zahir Shah, Asifa Tassaddiq, Poom Kumam, Saeed Islam, and Waris Khan. "A convective flow of Williamson nanofluid through cone and wedge with non-isothermal and non-isosolutal conditions: a revised Buongiorno model." *Case Studies in Thermal Engineering* 24 (2021): 100869. <https://doi.org/10.1016/j.csite.2021.100869>
- [6] Kiyani, M. Z., T. Hayat, I. Ahmad, M. Waqas, and A. Alsaedi. "Bidirectional Williamson nanofluid flow towards stretchable surface with modified Darcy's law." *Surfaces and Interfaces* 23 (2021): 100872. <https://doi.org/10.1016/j.surfin.2020.100872>
- [7] Amer Qureshi, Muhammad. "Numerical simulation of heat transfer flow subject to MHD of Williamson nanofluid with thermal radiation." *Symmetry* 13, no. 1 (2020): 10. <https://doi.org/10.3390/sym13010010>
- [8] Awan, Aziz Ullah, Syed Asif Ali Shah, and Bagh Ali. "Bio-convection effects on Williamson nanofluid flow with exponential heat source and motile microorganism over a stretching sheet." *Chinese Journal of Physics* 77 (2022): 2795-2810. <https://doi.org/10.1016/j.cjph.2022.04.002>
- [9] Fazal Haq, Seifedine Kadry, Yu-Ming Chu, Mair Khan, and M Ijaz Khan. "Modeling and theoretical analysis of gyrotactic microorganisms in radiated nanomaterial Williamson fluid with activation energy." *Journal of Materials Research and Technology* 9, no. 5 (2020): 10468-10477. <https://doi.org/10.1016/j.jmrt.2020.07.025>
- [10] Waqas, M., M. Ijaz Khan, Zeeshan Asghar, Seifedine Kadry, Yu-Ming Chu, and W. A. Khan. "Interaction of heat generation in nonlinear mixed/forced convective flow of Williamson fluid flow subject to generalized Fourier's and Fick's concept." *Journal of Materials Research and Technology* 9, no. 5 (2020): 11080-11086. <https://doi.org/10.1016/j.jmrt.2020.07.068>
- [11] Rosli, Wan Muhammad Hilmi Wan, Muhammad Khairul Anuar Mohamed, Norhafizah Md Sarif, Nurul Farahain Mohammad, and Siti Khuzaimah Soid. "Blood Conveying Ferroparticle Flow on a Stagnation Point Over a Stretching Sheet: Non-Newtonian Williamson Hybrid Ferrofluid." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 97, no. 2 (2022): 175-185. <https://doi.org/10.37934/arfmts.97.2.175185>
- [12] Choi, S. US, and Jeffrey A. Eastman. *Enhancing thermal conductivity of fluids with nanoparticles*. No. ANL/MSD/CP-84938; CONF-951135-29. Argonne National Lab.(ANL), Argonne, IL (United States), 1995.
- [13] Lee, S., SU-S. Choi, S, and Li, and J. A. Eastman. "Measuring thermal conductivity of fluids containing oxide nanoparticles." (1999): 280-289. <https://doi.org/10.1115/1.2825978>

- [14] Eastman, Jeffrey A., S. U. S. Choi, Sheng Li, W. Yu, and L. J. Thompson. "Anomalously increased effective thermal conductivities of ethylene glycol-based nanofluids containing copper nanoparticles." *Applied physics letters* 78, no. 6 (2001): 718-720. <https://doi.org/10.1063/1.1341218>
- [15] Hikmet Ş Aybar, Mohsen Sharifpur, M Reza Azizian, Mehdi Mehrabi, and Josua P Meyer. "A review of thermal conductivity models for nanofluids." *Heat Transfer Engineering* 36, no. 13 (2015): 1085-1110. <https://doi.org/10.1080/01457632.2015.987586>
- [16] Afify, A. A., and M. A. A. Bazid. "Flow and heat transfer analysis of nanofluids over a moving surface with temperature-dependent viscosity and viscous dissipation." *Journal of Computational and Theoretical Nanoscience* 11, no. 12 (2014): 2440-2448. <https://doi.org/10.1166/jctn.2014.3660>
- [17] Lin, Yanhai, Botong Li, Liancun Zheng, and Goong Chen. "Particle shape and radiation effects on Marangoni boundary layer flow and heat transfer of copper-water nanofluid driven by an exponential temperature." *Powder Technology* 301 (2016): 379-386. <https://doi.org/10.1016/j.powtec.2016.06.029>
- [18] Alkasasbeh, Hamzeh, Mohammed Swalmeh, Hebah Bani Saeed, Feras Al Faqih, and Adeb Talafha. "Investigation on CNTs-water and human blood based Casson nanofluid flow over a stretching sheet under impact of magnetic field." *Frontiers in Heat and Mass Transfer (FHMT)* 14 (2020). <http://dx.doi.org/10.5098/hmt.14.15>
- [19] Alwawi, Firas A., Hamzeh T. Alkasasbeh, A. M. Rashad, and Ruwaidiah Idris. "MHD natural convection of Sodium Alginate Casson nanofluid over a solid sphere." *Results in physics* 16 (2020): 102818. <https://doi.org/10.1016/j.rinp.2019.102818>
- [20] Alwawi, Firas A., Hamzeh T. Alkasasbeh, Ahmed M. Rashad, and Ruwaidiah Idris. "A numerical approach for the heat transfer flow of carboxymethyl cellulose-water based Casson nanofluid from a solid sphere generated by mixed convection under the influence of Lorentz force." *Mathematics* 8, no. 7 (2020): 1094. <https://doi.org/10.3390/math8071094>
- [21] Alwawi, Firas A., Hamzeh T. Alkasasbeh, A. M. Rashad, and Ruwaidiah Idris. "Heat transfer analysis of ethylene glycol-based Casson nanofluid around a horizontal circular cylinder with MHD effect." *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science* 234, no. 13 (2020): 2569-2580. <https://doi.org/10.1177/0954406220908624>
- [22] Abdulkareem Saleh Hamarsheh, Firas A Alwawi, Hamzeh T Alkasasbeh, Ahmed M Rashad, and Ruwaidiah Idris. "Heat transfer improvement in MHD natural convection flow of graphite oxide/carbon nanotubes-methanol based casson nanofluids past a horizontal circular cylinder." *Processes* 8, no. 11 (2020): 1444. <https://doi.org/10.3390/pr8111444>
- [23] Alwawi, Firas A., Abdulkareem Saleh Hamarsheh, Hamzeh T. Alkasasbeh, and Ruwaidiah Idris. "Mixed convection flow of magnetized Casson nanofluid over a cylindrical surface." *Coatings* 12, no. 3 (2022): 296. <https://doi.org/10.3390/coatings12030296>
- [24] Jamil, Furqan, and Hafiz Muhammad Ali. "Applications of hybrid nanofluids in different fields." In *Hybrid nanofluids for convection heat transfer*, pp. 215-254. Academic Press, 2020. <https://doi.org/10.1016/B978-0-12-819280-1.00006-9>
- [25] Nohavica, Dušan, and Petar Gladkov. "ZnO nanoparticles and their applications-new achievements." *Olomouc, Czech Republic, EU* 10 (2010): 12-14.
- [26] Recep Ekiciler, Kamil Arslan, Oğuz Turgut, and Burak Kurşun. "Effect of hybrid nanofluid on heat transfer performance of parabolic trough solar collector receiver." *Journal of Thermal Analysis and Calorimetry* 143, no. 2 (2021): 1637-1654. <https://doi.org/10.1007/s10973-020-09717-5>
- [27] Leena, M., and S. Srinivasan. "Synthesis and ultrasonic investigations of titanium oxide nanofluids." *Journal of Molecular Liquids* 206 (2015): 103-109. <https://doi.org/10.1016/j.molliq.2015.02.001>
- [28] Yahya, Asmat Ullah, Nadeem Salamat, Wen-Hua Huang, Imran Siddique, Sohaib Abdal, and Sajjad Hussain. "Thermal characteristics for the flow of Williamson hybrid nanofluid (MoS₂+ ZnO) based with engine oil over a stretched sheet." *Case Studies in Thermal Engineering* 26 (2021): 101196. <https://doi.org/10.1016/j.csite.2021.101196>
- [29] Alsabery, A. I., H. T. Kadhim, M. A. Ismael, I. Hashim, and A. J. Chamkha. "Impacts of amplitude and heat source on natural convection of hybrid nanofluids into a wavy enclosure via heatline approach." *Waves in Random and Complex Media* (2021): 1-25. <https://doi.org/10.1080/17455030.2021.1896819>
- [30] Hamzeh Alkasasbeh. "Numerical Solution of Heat Transfer Flow of Casson Hybrid Nanofluid over Vertical Stretching Sheet with Magnetic Field Effect." *CFD Letters* 14, no. 3 (2022): 39-52. <https://doi.org/10.37934/cfdl.14.3.3952>
- [31] Hamzeh Alkasasbeh. "Mathematical modeling of MHD flow of hybrid micropolar ferrofluids about a solid sphere." *Frontiers in Heat and Mass Transfer (FHMT)* 18 (2022). <http://dx.doi.org/10.5098/hmt.18.43>
- [32] Mohamed, Muhammad Khairul Anuar, Huei Ruey Ong, Hamzah Taha Alkasasbeh, and Mohd Zuki Salleh. "Heat Transfer of Ag-Al₂O₃/Water Hybrid Nanofluid on a Stagnation Point Flow over a Stretching Sheet with Newtonian

- Heating." In *Journal of Physics: Conference Series*, vol. 1529, no. 4, p. 042085. IOP Publishing, 2020. <https://doi.org/10.1088/1742-6596/1529/4/042085>
- [33] Sajjad, Muhammad, Ali Mujtaba, Adnan Asghar, and Teh Yuan Ying. "Dual solutions of magnetohydrodynamics Al₂O₃+ Cu hybrid nanofluid over a vertical exponentially shrinking sheet by presences of joule heating and thermal slip condition." *CFD Letters* 14, no. 8 (2022): 100-115. <https://doi.org/10.37934/cfdl.14.8.100115>
- [34] Asghar, Adnan, Teh Yuan Ying, and Wan Mohd Khairy Adly Wan Zaimi. "Two-Dimensional Mixed Convection and Radiative Al₂O₃-Cu/H₂O Hybrid Nanofluid Flow over a Vertical Exponentially Shrinking Sheet with Partial Slip Conditions." *CFD Letters* 14, no. 3 (2022): 22-38. <https://doi.org/10.37934/cfdl.14.3.2238>
- [35] Gurrampati, Venkata Ramana Reddy. "Cattaneo-Christov Heat and Mass Transfer Flux Across Electro-Hydrodynamics Blood-Based Hybrid NanoFluid Subject to Lorentz Force." *CFD Letters* 14, no. 7 (2022): 124-134. <https://doi.org/10.37934/cfdl.14.7.124134>
- [36] Aziz Ullah Awan, N Ameer Ahammad, Sonia Majeed, Fehmi Gamaoun, and Bagh Ali. "Significance of hybrid nanoparticles, Lorentz and Coriolis forces on the dynamics of water based flow." *International Communications in Heat and Mass Transfer* 135 (2022): 106084. <https://doi.org/10.1016/j.icheatmasstransfer.2022.106084>
- [37] Li, Yi-Xia, Sumaira Qayyum, M. Ijaz Khan, Yasser Elmasry, and Yu-Ming Chu. "Motion of hybrid nanofluid (MnZnFe₂O₄-NiZnFe₂O₄-H₂O) with homogeneous-heterogeneous reaction: Marangoni convection." *Mathematics and Computers in Simulation* 190 (2021): 1379-1391. <https://doi.org/10.1016/j.matcom.2021.07.017>
- [38] Chu, Yu-Ming, Sardar Bilal, and Mohammed Reza Hajizadeh. "Hybrid ferrofluid along with MWCNT for augmentation of thermal behavior of fluid during natural convection in a cavity." *Mathematical Methods in the Applied Sciences* (2020). <https://doi.org/10.1002/mma.6937>
- [39] Idris, Muhammad Syafiq, Irnie Azlin Zakaria, and Wan Azmi Wan Hamzah. "Heat transfer and pressure drop of water based hybrid Al₂O₃: SiO₂ nanofluids in cooling plate of PEMFC." *Journal of Advanced Research in Numerical Heat Transfer* 4, no. 1 (2021): 1-13.
- [40] Turgut Sarpkaya. "Flow of non-Newtonian fluids in a magnetic field." *AIChE Journal* 7, no. 2 (1961): 324-328. <https://doi.org/10.1002/aic.690070231>
- [41] Abid Hussanan, Mohd Zuki Salleh, Hamzeh Taha Alkasasbeh, and Ilyas Khan. "MHD flow and heat transfer in a Casson fluid over a nonlinearly stretching sheet with Newtonian heating." *Heat transfer research* 49, no. 12 (2018). <https://doi.org/10.1615/HeatTransRes.2018014771>
- [42] Alkasasbeh, Hamzeh Taha. "Numerical solution of micropolar Casson fluid behaviour on steady MHD natural convective flow about a solid sphere." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 50, no. 1 (2018): 55-66.
- [43] Bagh Ali, Rizwan Ali Naqvi, Yufeng Nie, Shahid Ali Khan, Muhammad Tariq Sadiq, Ateeq Ur Rehman, and Sohaib Abdal. "Variable viscosity effects on unsteady MHD an axisymmetric nanofluid flow over a stretching surface with thermo-diffusion: Fem approach." *Symmetry* 12, no. 2 (2020): 234. <https://doi.org/10.3390/sym12020234>
- [44] Iskander Tlili, SP Samrat, and N Sandeep. "A computational frame work on magnetohydrodynamic dissipative flow over a stretched region with cross diffusion: Simultaneous solutions." *Alexandria Engineering Journal* 60, no. 3 (2021): 3143-3152. <https://doi.org/10.1016/j.aej.2021.01.052>
- [45] Sohaib Abdal, Bagh Ali, Saba Younas, Liaqat Ali, and Amna Mariam. "Thermo-diffusion and multislip effects on MHD mixed convection unsteady flow of micropolar nanofluid over a shrinking/stretching sheet with radiation in the presence of heat source." *Symmetry* 12, no. 1 (2019): 49. <https://doi.org/10.3390/sym12010049>
- [46] Abbas, Zameer, Sohaib Abdal, Nasir Hussain, Fayyaz Hussain, Muhammad Adnan, Bagh Ali, Rana Muhammad Zulqarnain, Liaqat Ali, and Saba Younas. "Mhd boundary layer flow and heat transfer of nanofluid over a vertical stretching sheet in the presence of a heat source." *Scientific Inquiry and Review* 3, no. 4 (2019): 60-73. <https://doi.org/10.32350/sir.34.05>
- [47] Aziz Ullah Awan, Sana Abid, Naeem Ullah, and Sohail Nadeem. "Magnetohydrodynamic oblique stagnation point flow of second grade fluid over an oscillatory stretching surface." *Results in Physics* 18 (2020): 103233. <https://doi.org/10.1016/j.rinp.2020.103233>
- [48] Akbar, Asia Ali, Aziz Ullah Awan, Mutasem Z. Bani-Fwaz, ElSayed M. Tag-ElDin, Kamel Guedri, Mansour F. Yassen, and Bagh Ali. "Linear and quadratic convection significance on the dynamics of MHD Maxwell fluid subject to stretched surface." *Frontiers in Physics* (2022): 693. <https://doi.org/10.3389/fphy.2022.974681>
- [49] Shah, Syed Asif Ali, N. Ameer Ahammad, Bagh Ali, Kamel Guedri, Aziz Ullah Awan, Fehmi Gamaoun, and ElSayed M. Tag-ElDin. "Significance of bio-convection, MHD, thermal radiation and activation energy across Prandtl nanofluid flow: A case of stretching cylinder." *International Communications in Heat and Mass Transfer* 137 (2022): 106299. <https://doi.org/10.1016/j.icheatmasstransfer.2022.106299>

- [50] Faisal Shah, Muhammad Ijaz Khan, Yu-Ming Chu, and Seifedine Kadry. "Heat transfer analysis on MHD flow over a stretchable Riga wall considering Entropy generation rate: a numerical study." *Numerical Methods for Partial Differential Equations* (2020). <https://doi.org/10.1002/num.22694>
- [51] Noor Saeed Khan, Taza Gul, Saeed Islam, Ilyas Khan, Aisha M Alqahtani, and Ali Saleh Alshomrani. "Magnetohydrodynamic nanoliquid thin film sprayed on a stretching cylinder with heat transfer." *Applied Sciences* 7, no. 3 (2017): 271. <https://doi.org/10.3390/app7030271>
- [52] Abid Hussanan, Zulkhibri Ismail, Ilyas Khan, Atheer G Hussein, and Sharidan Shafie. "Unsteady boundary layer MHD free convection flow in a porous medium with constant mass diffusion and Newtonian heating." *The European Physical Journal Plus* 129, no. 3 (2014): 1-16. <https://doi.org/10.1140/epjp/i2014-14046-x>
- [53] Keller, Herbert B. "A new difference scheme for parabolic problems." In *Numerical Solution of Partial Differential Equations—II*, pp. 327-350. Academic Press, 1971. <https://doi.org/10.1016/B978-0-12-358502-8.50014-1>
- [54] Everett Jones. "An asymptotic outer solution applied to the Keller box method." *Journal of Computational Physics* 40, no. 2 (1981): 411-429. [https://doi.org/10.1016/0021-9991\(81\)90219-9](https://doi.org/10.1016/0021-9991(81)90219-9)
- [55] Cebeci, T. and Bradshaw, P., 2012. *Physical and computational aspects of convective heat transfer*. Springer Science & Business Media.
- [56] Hassanien, I. A., A. A. Abdullah, and R. S. R. Gorla. "Flow and heat transfer in a power-law fluid over a nonisothermal stretching sheet." *Mathematical and computer modelling* 28, no. 9 (1998): 105-116. [https://doi.org/10.1016/S0895-7177\(98\)00148-4](https://doi.org/10.1016/S0895-7177(98)00148-4)
- [57] Mohd Zuki Salleh, Roslinda Nazar, and I Pop. "Boundary layer flow and heat transfer over a stretching sheet with Newtonian heating." *Journal of the Taiwan Institute of Chemical Engineers* 41, no. 6 (2010): 651-655. <https://doi.org/10.1016/j.jtice.2010.01.013>